

GLB-1000-DE-240/277

1000W 240/277VAC
DE Electronic Ballast

FEATURES

- Operates SE and DE 1000W lamps only
- 825W, 750W and 600W dimmable settings
- 1150W Overdrive setting
- External control capability (Controls sold separately)
- Staggered start ignition
- Soft-start/Soft dimming
- Fanless design
- 240/277VAC voltage sensing input
- Weathertight twist-lock power input connector
- 6' 240VAC Line cord with plug
- Standard S-Type lamp connector
- LED display with status indicator
- UL Listed for Damp Locations
- Three year warranty (Terms and Conditions Apply)

PROTECTIONS

- Short circuit
- Ignition failure
- Thermal Protection
- Over voltage
- Hot Re-strike
- Open circuit
- End of Lamp Life (EOL)
- Soft-start
- Under voltage

PERFORMANCE

Rated Voltage: 240/277VAC

Input Frequency: 50/60Hz

Ambient operating temperature (TA): -20°C to 40°C (-4°F to 104°F)

Crest Factor (CF): <1.7


Power Factor (PF): ≥0.97

Total Harmonic Distortion (THD): <10%

Current draw: 4.50A @ 240VAC, 3.80A @ 277VAC

Inrush Current: 40A

Operates > 100kHz

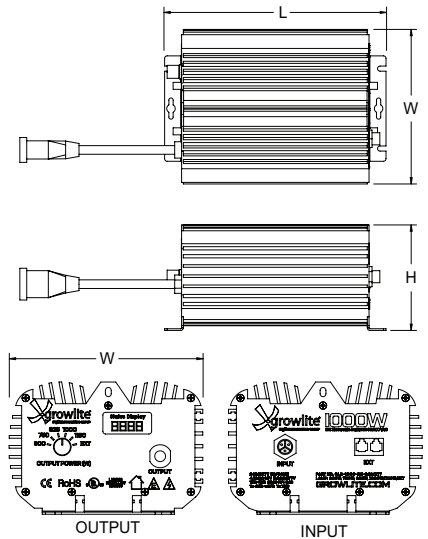

DIMENSIONS

Model	L	W	H
GLB-1000-DE-240/277	10.3" (262mm)	7.3" (185mm)	4.9" (124mm)

WEIGHT

Model	Installed Weight
GLB-1000-DE-240/277	9.9 lbs (4.5kgs)

ORDERING INFORMATION

Example: GLB-1000-DE-240/277

Series/Configuration	Description
GLB-1000-DE-240/277	1000W DE Electronic Ballast 240/277VAC