

# GLB-315-A-120/277

315W 120~277VAC Ceramic Metal Halide Electronic Ballast



## FEATURES


- Operates all 315W CMH lamps
- Soft Start stabilizes start-up loads and extends lamp life and performance
- LED status displays voltage and wattage in normal operation
- 6' 120VAC power cord provided
- 120/208/240/277VAC voltage sensing input
- Standard S-Type lamp connector
- UL Listed for damp location
- Three (3) year warranty

## PERFORMANCE

- Rated Voltage: AC90-305VAC
- Input Frequency: 50/60Hz
- Ambient Operating Temperature (TA): -25°C~50°C
- Crest Factor (CF): <1.5
- Power Factor (PF): ≥0.95
- Total Harmonic Distortion (THD): <20%
- Current Draw: 2.84A @ 120VAC, 1.42A @ 240V, 1.23A @ 277VAC

## PROTECTIONS

- Short Circuit
- Open Circuit
- End of Lamp Life (EOL)
- Hot-Start
- Ignition Failure
- Overheat
- Over/Under Voltage

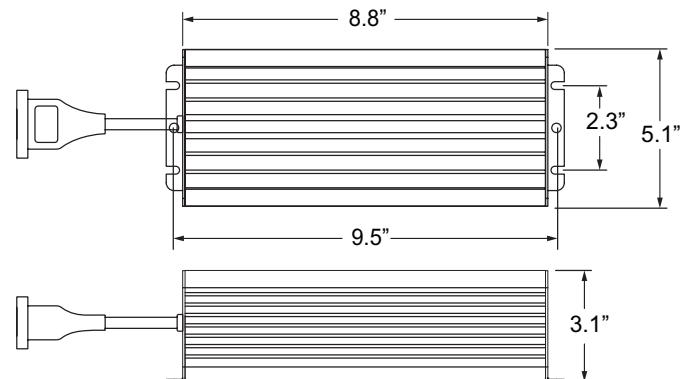

## PART NUMBER:

**GLB-315-A-120/277**

**Packaged Weight:**  
6.25 lbs / 2.8 kgs

**Installed Weight:**  
5.5 lbs / 2.5 kgs

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
Comments: \_\_\_\_\_  
Job Name: \_\_\_\_\_ Type: \_\_\_\_\_

Specifications are subject to change without notice.  
Installation must be performed in accordance with  
Barron Lighting Group installation instructions.

10790032 Rev 6 05/19



7885 North Glen Harbor Blvd  
Glendale, Arizona 85307  
800.533.3948  
growlite.com