



EXITRONIX
emergency lighting

barrontg.com

FLUSH RECESSED EMERGENCY LIGHTING

Architectural flush recessed ceiling mount.
Includes rectangular and oval trim plates.
UL 924 Damp Location Listed.
Adjustable optics provide up to 51' spacing.
Optional Self-test/Self-diagnostics.

FRM Series



FLUSH RECESSED EMERGENCY LIGHTING

The FRM Series leverages LED technology to provide a flush, recessed, ceiling mount emergency lighting unit. Two adjustable, low-profile optical assemblies utilize high powered LEDs to provide bright, uniform illumination at various mounting heights along the path of egress. The architectural FRM Series includes both rectangular and oval trim plates to complement any design aesthetic.



FEATURES & BENEFITS

- Architectural flush recessed ceiling mount
- Includes rectangular and oval trim plates
- UL 924 Damp Location Listed
- Adjustable optics with a total range of 0-15° (1.7° each click) providing up to 51' spacing
- Optional Self-test/Self-diagnostics
- Meets City of New York Emergency Code requirements

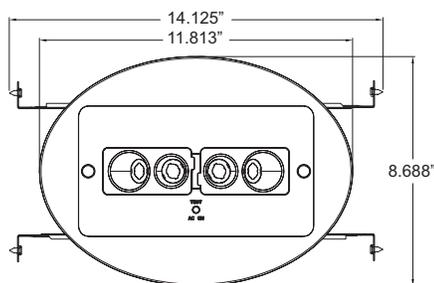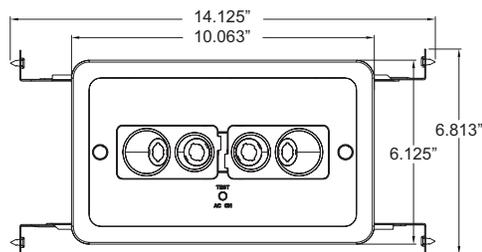

Overall depth: 2-7/8" Back box depth: 2-3/4"

SPECIFICATIONS

Illumination:	Each optical assembly contain (2) 1W long-life, high-intensity LEDs (4W total)
Construction:	Injection molded, 5VA flame retardant, impact resistant, thermoplastic trim plates cover a steel housing; hanger bars included
Input:	120-277VAC Primary, 60Hz
Battery:	Maintenance-free 4.8V NiMH battery
Operating Temp:	10°C to 50°C (50°F to 122°F)
Run Time:	UL Listed 90 minute emergency run time, 24 hour recharge time
Mounting:	Bar hangers included are compatible with drywall or drop ceiling mount installations
Finishes:	Black or White
Certifications:	UL 924 Listed for Damp Locations, meets or exceeds NFPA 101 Life Safety Code, NEC, OSHA requirements; California Energy Commission (CEC) Title 20 Compliant, Meets City of New York Emergency Code requirements
Warranty:	Any component that fails due to a manufacturing defect is guaranteed for five years with a separate five year prorated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information and product registration instructions. (Terms and Conditions apply)

ORDERING INFORMATION (Example: FRM-WH-G2)

Series	Finish	Options (Factory Installed)	Accessories ¹ (Field Installed)
FRM	BL = Black WH = White	G2 = Self-test/Self-diagnostics	WG-S = Wire Guard (Back Mount) XG-1 = Poly Guard (Back Mount)

Notes

¹ Order as separate line item



Specifications are subject to change without notice. Installation must be performed in accordance with Barron Lighting Group installation instructions.

10840468 MKT-LIT-FRM Rev 3

BARRON
lighting group
7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronlitg.com