

The Renegade Series LED Remote Lamp utilizes performance optics and provide superior spacing. This lamp is also compatible with any 6V or 12V battery system.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____

FEATURES AND BENEFITS

- Designed to operate from any 6V or 12V power source, no need to specify
- Compatible with [CP-EMW](#) and [NFT](#) series
- Each fully-adjustable, high-intensity lamp head contains three LEDs with individual, engineered refractors for maximum distribution, total wattage 2.9W per head
- Uniform lighting pattern provides optimal illumination over required path of egress, typical two lamp fixture provides 60' center-to-center spacing
- Rugged, injection-molded, high-temperature thermoplastic housing
- Available as remote or alternate head for traditional battery units
- Mounting plate not included unless options MP1 or MP2 are specified (MP1 = single REN3 lamp head with mounting plate; MP2 = two REN3 lamp heads with mounting plate)
- Standard finish: Black or White



CONSTRUCTION

The Renegade LED housing is constructed of rugged, injection-molded, high temperature thermoplastic housing in white.

ILLUMINATION

High-intensity lamp head contains three LEDs with individual, engineered refractors for maximum distribution.

ELECTRONICS


Compatible with any 6V or 12V battery system (sold separately), that provides a minimum of 2.9W per lamp. Utilizes three bright white LEDs with a total output of 250 lumens per lamp. (WL option 207 lumen)

CONFORMANCE TO CODES & STANDARDS

The Renegade Series meets or exceeds the following: UL 924, NEC requirements and NFPA 101.

WARRANTY

Any component that fails due to a manufacturing defect is guaranteed for three years. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information.

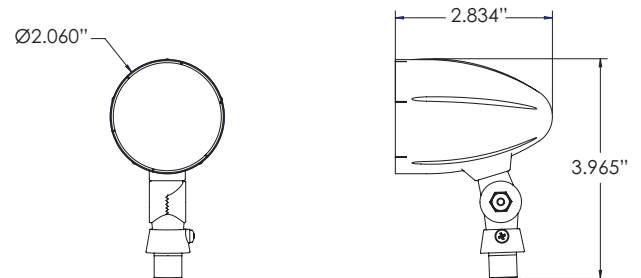

ORDERING INFORMATION Example: REN3WH-MP2

| Series | Options (Factory Installed) |
|--|---|
| REN3WH ^{1,2} = PAR16, 2.9W, White Housing | MP1 = Single (1) REN3 Lamp w/ Mounting Plate |
| | MP2 = Double (2) REN3 Lamps w/ Mounting Plate |

Notes

¹ Compatible with [CP-EMW](#) and [NFT](#) series

² Mounting plate not included, requires MP1 or MP2 option

ON-CENTER SPACING (Multiple units mounted at a typical 7.5 foot height)

| Model | # of LED Lamps | 6' Path, 6' Corridor |
|------------|----------------|----------------------|
| REN3WH-MP2 | 2 | 60' |

Barron assumes no responsibility for local requirements or specific project variables. This is a guideline to be used as a design aid, not as a guarantee of any code compliance.

