



For the complete line of specialtyLED<sup>®</sup> products, visit us online at [barronltg.com](http://barronltg.com) or call 800.533.3948.

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
Accessories: \_\_\_\_\_  
Job Name: \_\_\_\_\_ Type: \_\_\_\_\_

## XFMR-DIM-XX-96

96W - 12V OR 24V MAGNETIC DIMMABLE LED POWER SUPPLY

### FEATURES

- 3 year free replacement warranty
- Fully dimmable with low-voltage magnetic dimmer
- 1/8" thick, power coated steel NEMA 3R case
- Standard with mandatory secondary protection
- Meets Class 2 output limits
- 12 or 24 Volt "DC" rated output
- Meets or exceeds all UL, CUL, ANSI/UL, CSA requirements

### CONFORMANCE TO CODES AND STANDARDS

- Meets the requirements for UL standards 2108 and 1838
- Mandatory secondary protection, as stated in the National Electric Code Article 411, (1993, 1996, 1999, 2002, 2005 and 2008)
- Maybe be used with individual Listed components to meet system requirements, as long as all parts are listed to the same ANSI/UL standard




### ORDERING INFORMATION

**Example:** XFMR-DIM-12-96

	12 Volt, 96 Watt	24 Volt, 96 Watt
<b>Part Number:</b>	XFMR-DIM-12-96	XFMR-DIM-24-96
<b>Primary Voltage:</b>	120VAC-1A MAX	120VAC-1A MAX
<b>Output Voltage:</b>	12VDC-8A MAX	24VDC-4A MAX
<b>Breakers:</b>	2x4A (DUAL OUTPUT)	1x4A
<b>Frequency:</b>	60 Hz	60 Hz
<b>Dimensions:</b>	8.5" x 3.5" x 3"	8.5" x 3.5" x 3"
<b>Weight:</b>	5 LBS.	5 LBS.

### WIRING DIAGRAM

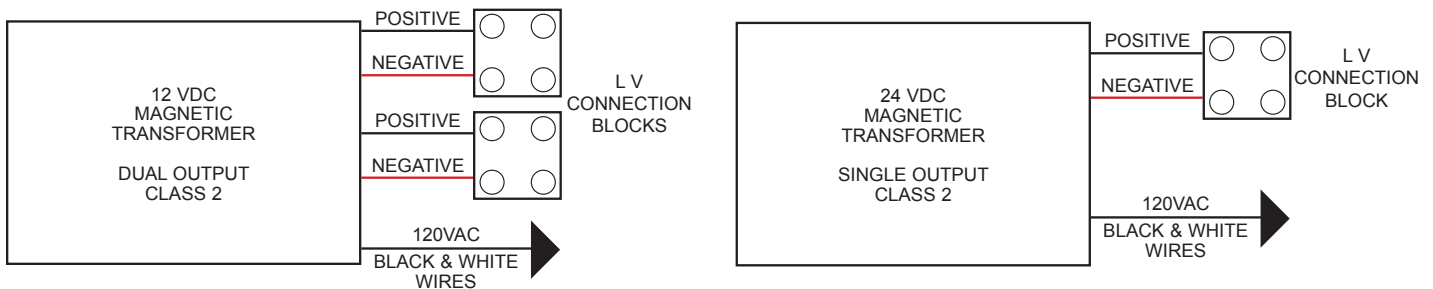

This is a transformer-based power supply. To dim, use a Low Voltage Magnetic Dimmer on the Primary. Input connection are the White / Black wires with Wire Nuts Attached. Output is through the White connection blocks: Red is Positive / Black is Negative

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE